



WITH 2 SPEED MOTOR AND 3 AXIS READ OUT, SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.

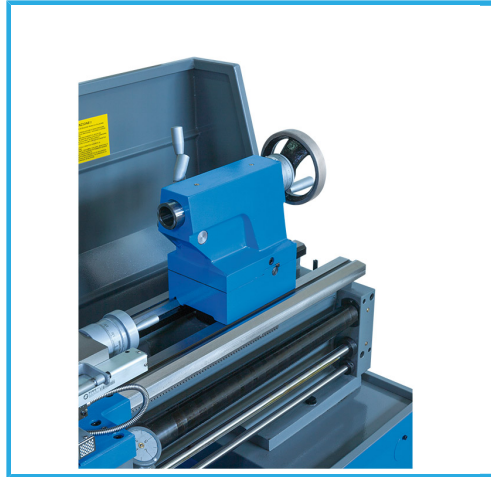

FERVIplus

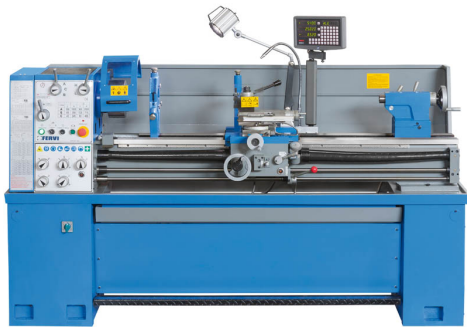

Centers height	200 mm
Max swing over the bed	400 mm
Max swing over the cross slide	258 mm
Tool height	20 mm
Distance between centers	1500 mm
Spindle bore	55 mm
Spindle bore	50 mm
Spindle nose Camlock	Camlock D1-5
Spindle bore taper MT	6
Spindle speed	(12) 45 - 2000 rpm
Longitudinal feeds	0,06 - 2,78 mm/rev
Cross feeds	0,01 - 0,72 mm/rev
Metric threads	0,8 - 14 mm
Inch threads	2 - 28 TPI
Tailstock taper MT	4
Motor	400V 50 Hz 1,5 / 2,4 kW
Dimensions	2360 x 760 x 1600 h mm
Net weight	850 kg
Packaging dimensions	2420 x 760 x 1600h mm
Gross weight	850,00 kg
EAN Code	8012667309350

Included

- 3+3 jaw self centering chuck Ø 200 mm
- 4 independent jaw chuck Ø 200 mm
- Reduction sleeve MT 6/4
- Face plate Ø 320 mm
- Follow rest
- Steady rest
- 2 x Dead center MT 4
- Live center MT 4
- Thread dial
- Leadscrew hood
- Chuck safeguard
- Full length splash guard
- Turret guard
- TOAB quick change tool post
- Working lamp LED
- Cooling system
- Foot brake
- Clutch on turning bar
- Quick locking tailstock carriage
- Wagon gears in oil bath