


WITH DOWN FEED, ROTATION SELECTION AND DRIVE BELT.

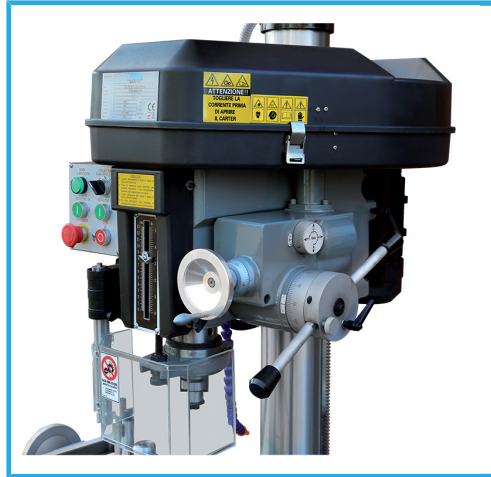

Max drilling capacity on steel with pre-drilling hole(s235jr)	32 mm
Face milling cutter max	80 mm
End milling cutter max	20 mm
Spindle taper	CM 3
Chuck sizes	1 - 13 mm B16
Spindle speed	100 - 2080 rpm
Spindle travel	130 mm
Spindle rotation	Dx - Sx
Quill	75 mm
Column	115 mm
Headstock travel	405 mm
Manual vertical feed division	0,05 mm
Feed range	0,12 - 0,18 - 0,25 mm/rev
Distance spindle axis - column surface	197 mm
Distance between spindle nose and table	600 mm
Table dimensions	585 x 190 mm
Slot	12 mm
Longitudinal axis	180 mm
Cross axis	380 mm
Base dimensions	470 x 670 mm
Motor	400 V 50 Hz 1,5 kW
Cooling pump	400v 50 Hz 0.4 KW
Dimensions	928 x 910 x 1700h mm

Included

- Drill chuck with key 1 - 16 B16
- Spindle drilled MT 3
- Spindle taper shank MT 3 Ø 27 mm
- Reduction sleeve MT 3/2
- Coolant system
- Oilers
- Tie rod M12
- Service keys

Net weight	310 kg
Packaging dimensions	950x760x1885 h mm
Gross weight	330,00 kg
EAN Code	8012667309749