
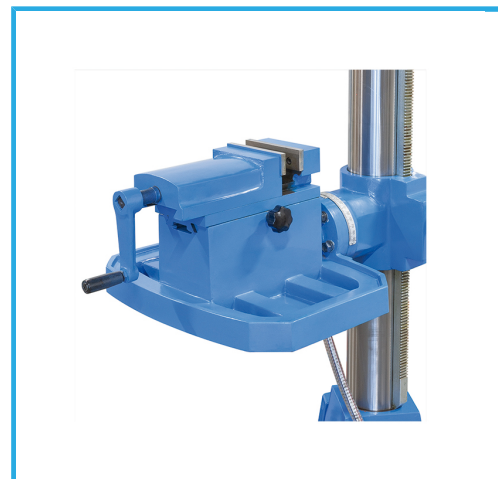


REVERSIBLE, TABLE REVERSIBLE WITH 140MM VICE, COOLING SYSTEM.

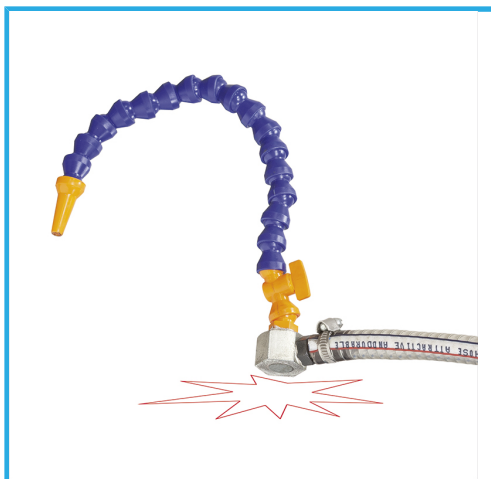

Max drilling capacity on cast iron with pre-drilling hole	Ø 38 mm
Max drilling capacity on steel with pre-drilling hole(s235jr)	Ø 32 mm
Continuous drilling capacity	Ø 28 mm
Spindle taper	4
Chuck sizes	1 - 13 mm B16
Spindle speed	100 - 2200 rpm
Spindle travel	130 mm
Quill	75 mm
Column	123 mm
Manual vertical feed division	0,05 mm
Distance spindle axis - column surface	300 mm
Distance between spindle nose and table	50 - 800 mm
Distance between spindle nose and base	1220 mm
Table dimensions	500 x 380 mm
Slot	14 mm
Tilting table	±90°
Vice	125 mm
Base dimensions	610 x 670 mm
Motor	400 V 50 Hz 1,1 - 1,9 kW
Cooling pump	400 V 50 Hz 75 W
Dimensions	700 x 1100 x 1900 mm
Net weight	375 kg
Packaging dimensions	1140x620x2020 h mm

**Included**

Drill chuck with key 1 - 13 mm B16  
Drill chuck shank MT 4 B16  
Morse taper reduction sleeve MT 4/3  
Morse taper reduction sleeve MT 3/2

**Gross weight**

417,00 kg

**EAN Code**

8012667362140