
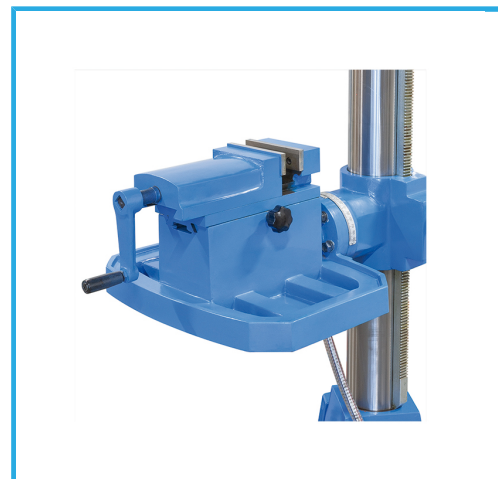


REVERSIBLE, WITH AUTOMATIC FEEDING, COOLANT SYSTEM,  
 REVERSIBLE TABLE WITH 140MM VICE.

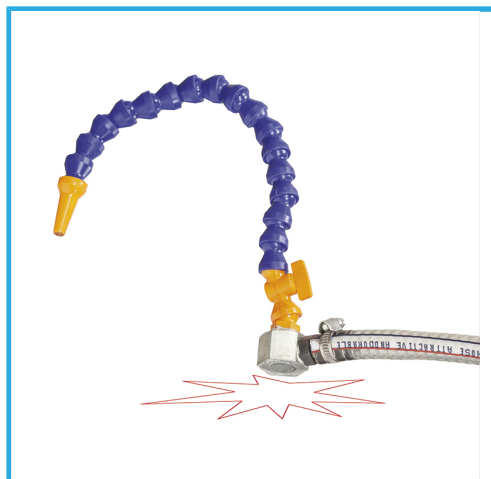

<b>Max drilling capacity on cast iron with pre-drilling hole</b>	Ø 38 mm
<b>Max drilling capacity on steel with pre-drilling hole(s235jr)</b>	Ø 32 mm
<b>Continuous drilling capacity</b>	Ø 28 mm
<b>Spindle taper</b>	MT 4
<b>Chuck sizes</b>	1 - 13 B16
<b>Spindle speed</b>	100 - 2200 rpm
<b>Spindle travel</b>	130 mm
<b>Quill</b>	75 mm
<b>Column</b>	123 mm
<b>Manual vertical feed division</b>	0,05 mm
<b>Feed range</b>	(3) 0,05 - 0,1 - 0,2 mm/rev
<b>Distance between spindle nose and table</b>	300 mm
<b>Distance between spindle nose and base</b>	1220 mm
<b>Table dimensions</b>	500 x 380 mm
<b>Slot</b>	14 mm
<b>Tilting table</b>	±90°
<b>Vice</b>	125 mm
<b>Base dimensions</b>	460 x 670 mm
<b>Motor</b>	400 V 50 Hz 1,1/1,9 kW
<b>Cooling pump</b>	400 V 50 Hz 75 W
<b>Dimensions</b>	700 x 1100 x 1900 mm
<b>Net weight</b>	385 kg
<b>Packaging dimensions</b>	1150 x 620 x 2050 h mm

**Included**

Drill chuck with key 1 - 13 mm B16  
 Drill chuck shank MT 4 B16  
 Morse taper reduction sleeve MT 4/3  
 Morse taper reduction sleeve MT 3/2

**Gross weight**

434,00 kg

**EAN Code**

8012667362157