



ISO 40, WITH AUTOMATIC DOWN FEED, MOTORIZED CROSS TABLE ON ALL AXES, 3 AXIS READ OUT AND JAPANESE INVERTER.

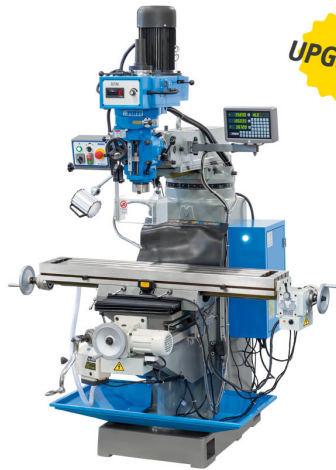

**UPGRADE**

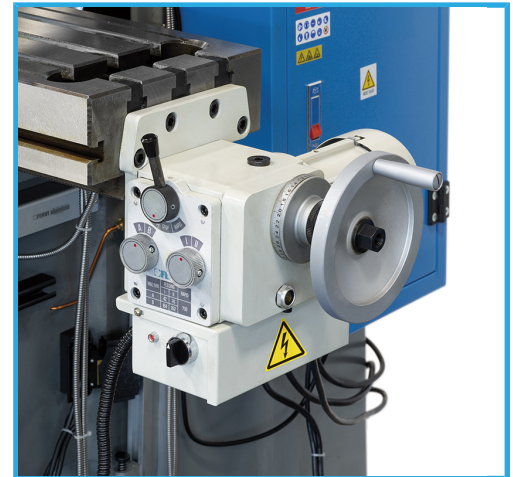

<b>Face milling cutter max</b>	100 mm
<b>End milling cutter max</b>	35 mm
<b>Max drilling capacity on cast iron with pre-drilling hole</b>	60 mm
<b>Max drilling capacity on steel with pre-drilling hole(s235jr)</b>	24 mm
<b>Spindle nose Camlock</b>	ISO 40 - DIN 2080
<b>Quill</b>	86 mm
<b>Spindle travel</b>	127 mm
<b>Head tilt left and right</b>	± 45°
<b>Vertical head rotation</b>	± 90°
<b>Head body rotation</b>	± 180°
<b>Variable spindle speed</b>	60 - 3600 rpm
<b>Motor</b>	400 V 50 Hz 2.25 kW
<b>Table movement motor</b>	(X,Y) 400V 50 Hz 180 W (Z) 400V 50 Hz 100W
<b>Cooling pump</b>	400V 50 Hz 90 W
<b>Feed range</b>	(3) 0.04 - 0.08 - 0.15 mm/rev
<b>Surface speed</b>	(X,Y) 42 - 76 - 164 - 262 mm/min (Z) 0 - 457 mm/min
<b>Distance between spindle nose and table</b>	45 - 395 mm
<b>Distance spindle axis - column surface</b>	215-450 mm
<b>Table dimensions</b>	1246 x 230 mm
<b>Longitudinal axis</b>	850 mm
<b>Cross axis</b>	310 mm

**Included**

- Base with chip tank
- Refrigeration plant
- LED lamp
- Display for viewing the rotation speed
- 3-axis viewer
- Variable speed motorized axes with rapid function
- Round table flyers with neutral function
- Guide lubrication system with manual pump

<b>Slot</b>	16 mm
<b>Maximum capacity</b>	400 kg
<b>Dimensions</b>	1680 x 1500 x 2100 h mm
<b>Net weight</b>	1000 kg
<b>Packaging dimensions</b>	1420 x 1600 x 2400 h mm
<b>Gross weight</b>	1000,00 kg
<b>EAN Code</b>	8012667356118