


**3 AXIS READ OUT, SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.**

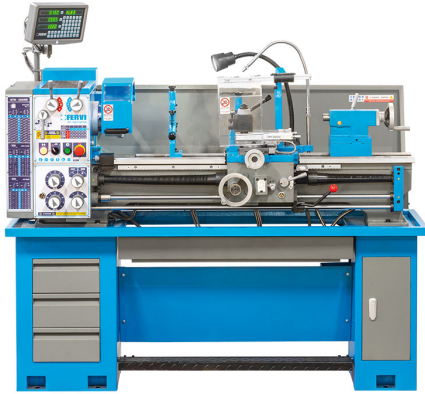

<b>Centers height</b>	160 mm
<b>Max swing over the bed</b>	320 mm
<b>Max swing over the cross slide</b>	180 mm
<b>Tool height</b>	16 mm
<b>Distance between centers</b>	1000 mm
<b>Spindle bore taper MT</b>	5
<b>Spindle bore</b>	38 mm
<b>Spindle nose Camlock</b>	Camlock D1-4
<b>Spindle speed</b>	(18) 75-1800 rpm
<b>Longitudinal feeds</b>	(40) 0,053 - 1,291 mm/rev
<b>Cross feeds</b>	(40) 0,011 - 0,275 mm/rev
<b>Metric threads</b>	(32) 0,4 - 7 mm
<b>Inch threads</b>	(36) 4 - 60 TPI
<b>Tailstock taper MT</b>	3
<b>Motor</b>	230 V 50/60 Hz 1.5 kW
<b>Dimensions</b>	1850 x 700 x 1550 mm
<b>Net weight</b>	550 Kg
<b>Gross weight</b>	570,00 kg
<b>EAN Code</b>	8012667406295

**Included**

- 3+3 jaw self centering chuck Ø 160 mm
- 4 Reversible independent jaws chuck Ø 200 mm
- Face plate Ø 250 mm
- Follow rest
- Steady rest
- Reduction sleeve MT 5/3
- Dead center MT 3
- Dead center MT 5
- Live center MT 3
- Foot brake
- Thread dial
- Leadscrew protection
- Turret protection
- Chuck safeguard
- Full length splash guard
- TOAE quick change tool post
- Working lamp LED
- Quick locking tailstock carriage
- Cooling system
- Clutch on turning bar
- Wagon gears in oil bath