


SE UTILIZA PRINCIPALMENTE EN TORNOS CON EL OBJETIVO DE ESTABILIZAR PIEZAS LARGAS Y DELGADAS, MÁS SUJETAS A FLEXIONES U...



€190,00

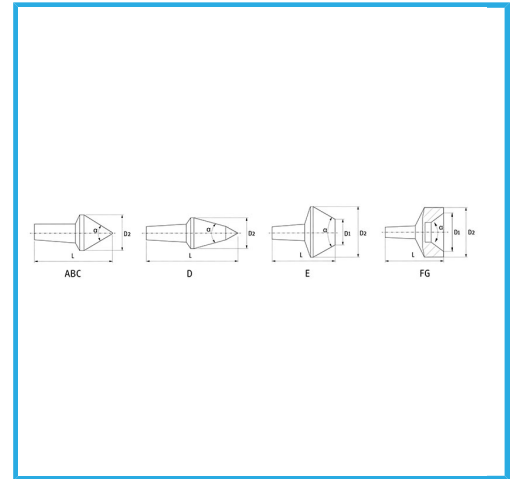

Cono mordazas

	2
A	L2 39 mm - D2-D3 16 mm - $\hat{I}\pm 60^\circ$ mm
B	L2 35,5 mm - D2-D3 16 mm - $\hat{I}\pm 75^\circ$ mm
C	L2 33 mm - D2-D3 16 mm - $\hat{I}\pm 90^\circ$ mm
D	L2 46 mm - D2-D3 16 mm - $\hat{I}\pm 60^\circ$ mm
E	L2 40 mm - D2-D3 25 mm / 10 mm - $\hat{I}\pm 60^\circ$ mm
F	L2 36 mm - D2-D3 16 mm / 10 mm - $\hat{I}\pm 60^\circ$ mm
G	L2 39 mm - D2-D3 20 mm / 16 mm - $\hat{I}\pm 60^\circ$ mm

Máx. r.p.m. 5000 g/min

Capacidad máx. 45 kg

Peso bruto 1,32 kg

Codigo de barras 8012667244682



Estuche de transporte



Templado



9 Pcs



Acero



Rectificado