


MAINLY USED IN LATHES WITH THE AIM OF STABILIZING LONG AND THIN PIECES, MORE SUBJECT TO BENDING OR UNCONTROLLED OSCILLATION...

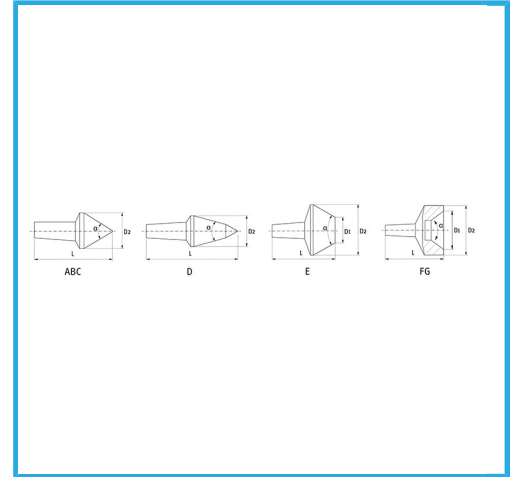

Spindle taper

	4
A	L2 61,5 mm - D2-D3 28 mm - $\hat{I} \pm 60^\circ$ mm
B	L2 55,5 mm - D2-D3 28 mm - $\hat{I} \pm 75^\circ$ mm
C	L2 51,5 mm - D2-D3 28 mm - $\hat{I} \pm 90^\circ$ mm
D	L2 69 mm - D2-D3 26 mm - $\hat{I} \pm 60^\circ$ mm
E	L2 61,5 mm - D2-D3 50 mm / 28 mm - $\hat{I} \pm 60^\circ$ mm
F	L2 55 mm - D2-D3 40 mm / 35 mm - $\hat{I} \pm 60^\circ$ mm
G	L2 60 mm - D2-D3 55 mm / 48 mm - $\hat{I} \pm 60^\circ$ mm

rpm max 5000 g/min

Maximum capacity 240 kg

Gross weight 3,88 kg

EAN Code 8012667011178



Carrying case



Tempered



9 Pcs



Steel



Grounded