



3 AXIS READ OUT, SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.

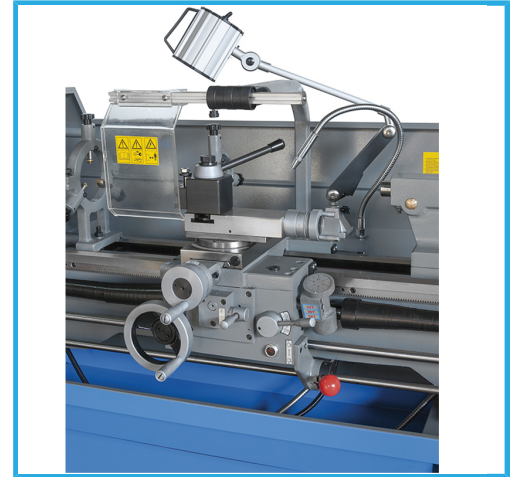

**FERVIplus**

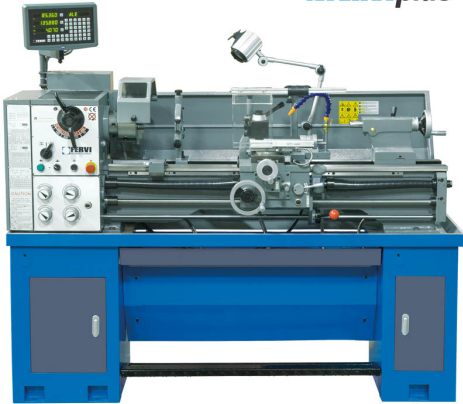

|                                       |                        |
|---------------------------------------|------------------------|
| <b>Centers height</b>                 | 160 mm                 |
| <b>Max swing over the bed</b>         | 320 mm                 |
| <b>Max swing over the cross slide</b> | 198 mm                 |
| <b>Max swing over the gap</b>         | 470 mm                 |
| <b>Tool height</b>                    | 20 mm                  |
| <b>Distance between centers</b>       | 1000 mm                |
| <b>Spindle bore</b>                   | 51 mm                  |
| <b>Spindle nose Camlock</b>           | Camlock D1-5           |
| <b>Spindle bore taper MT</b>          | 5                      |
| <b>Spindle speed</b>                  | (8) 70 - 2000 rpm      |
| <b>Longitudinal feeds</b>             | 0.052 - 1.392 mm/rev   |
| <b>Cross feeds</b>                    | 0.009 - 0.253 mm/rev   |
| <b>Metric threads</b>                 | 0,4 - 7 mm             |
| <b>Inch threads</b>                   | 4 - 56 TPI             |
| <b>Tailstock taper MT</b>             | 3                      |
| <b>Motor</b>                          | 400 V 50 Hz 1,5 kW     |
| <b>Dimensions</b>                     | 1820 x 800 x 1320 h mm |
| <b>Net weight</b>                     | 630 kg                 |
| <b>Packaging dimensions</b>           | 1930 x 760 x 1600 h mm |
| <b>Gross weight</b>                   | 630,00 kg              |
| <b>EAN Code</b>                       | 8012667276355          |

### Included

3+3 jaw self centering chuck Ø 200 mm  
 4 Reversible independent jaws chuck Ø 200 mm  
 Reduction sleeve MT 6/4  
 Face plate Ø 320 mm  
 Follow rest  
 Steady rest  
 Dead center MT 3  
 Dead center MT 4  
 Live center MT 3  
 Foot brake  
 Thread dial  
 Leadscrew hood  
 Turret protection  
 Chuck safeguard  
 Full length splash guard  
 TOAE quick change tool post  
 Working lamp  
 Cooling system  
 Clutch on turning bar  
 Quick locking tailstock carriage  
 Wagon gears in oil bath