



WITH SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.

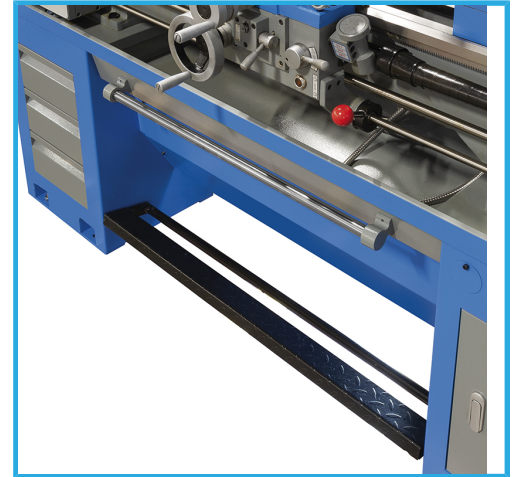

**FERVIplus**

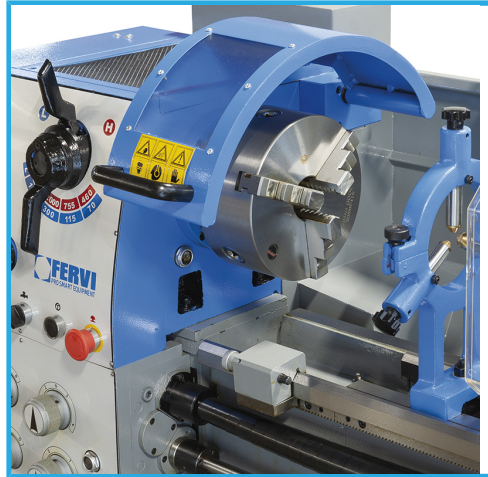

<b>Centers height</b>	190 mm
<b>Max swing over the bed</b>	380 mm
<b>Max swing over the cross slide</b>	225 mm
<b>Max swing over the gap</b>	503 mm
<b>Tool height</b>	20 mm
<b>Distance between centers</b>	1000 mm
<b>Spindle bore</b>	51 mm
<b>Spindle nose Camlock</b>	Camlock D1-5
<b>Spindle bore taper MT</b>	6
<b>Spindle speed</b>	70 - 2000 rpm
<b>Longitudinal feeds</b>	0,052 - 1,392 mm/rev
<b>Cross feeds</b>	0,014 - 0,380 mm/rev
<b>Metric threads</b>	0,4 - 7 mm
<b>Inch threads</b>	4 - 56 TPI
<b>Tailstock taper MT</b>	4
<b>Motor</b>	400V 50 Hz 1,5 kW
<b>Dimensions</b>	1820 x 800 x 1320 h mm
<b>Net weight</b>	630 kg
<b>Packaging dimensions</b>	1930 x 760 x 1600h mm
<b>Gross weight</b>	633,00 kg
<b>EAN Code</b>	8012667289386

**Included**

3+3 jaw self centering chuck Ø 200 mm  
 4 Reversible independent jaws chuck Ø 200 mm  
 Reduction sleeve MT 6/4  
 Face plate Ø 320 mm  
 Follow rest  
 Steady rest  
 2 x Dead center MT 4  
 Live center MT 4  
 Foot brake  
 Thread dial  
 Turret guard  
 Leadscrew hood  
 Chuck safeguard  
 TOAE quick change tool post  
 Working lamp  
 Full length splash guard  
 Cooling system  
 Clutch on turning bar  
 Quick locking tailstock carriage  
 Wagon gears in oil bath