
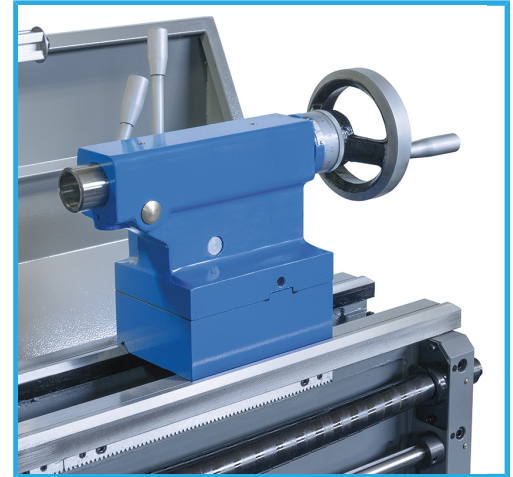


3 AXIS READ OUT AND SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.

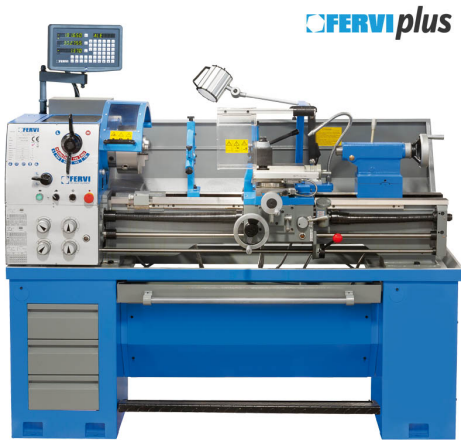

Centers height	190 mm
Max swing over the bed	380 mm
Max swing over the cross slide	225 mm
Max swing over the gap	503 mm
Tool height	20 mm
Distance between centers	1000 mm
Spindle bore	51 mm
Spindle nose Camlock	Camlock D1-5
Spindle bore taper MT	6
Spindle speed	70 - 2000 rpm
Longitudinal feeds	0,052 - 1,392 mm/rev
Cross feeds	0,014 - 0,380 mm/rev
Metric threads	0,4 - 7 mm
Inch threads	4 - 56 TPI
Tailstock taper MT	4
Motor	400V 50 Hz 1,5 kW
Dimensions	1800 x 800 x 1600 h mm
Net weight	640 kg
Packaging dimensions	750 x 1930 x 1575 h mm
Gross weight	687,00 kg
EAN Code	8012667289379

Included

- 3+3 jaw self centering chuck Ø 200 mm
- 4 Reversible independent jaws chuck Ø 200 mm
- Reduction sleeve MT 6/4
- Face plate Ø 320 mm
- Follow rest
- Steady rest
- 2 x Dead center MT 4
- Live center MT 4
- Thread dial
- Leadscrew hood
- Chuck safeguard
- Full length splash guard
- Turret guard
- TOAE quick change tool post
- Working LED lamp
- Cooling system
- Foot brake
- Clutch on turning bar
- Quick locking tailstock carriage
- Wagon gears in oil bath